




ASPRE 2 LTD



700C alu 6061 X-lite 52 / 54 / 56 / 58 cm 20 speed 10,6 kg

TECHNICAL DATA

WHEEL SIZE / FRAME	700C / alu 6061 X-lite
SIZE	52 cm / 54 cm / 56 cm / 58 cm
FORK	Carbon tapered
DAMPER	—
DRIVETRAIN	20 speed
FRONT SHIFTERS	Shimano GRX RX-400 2 speed
REAR SHIFTERS	Shimano GRX RX-400 10 speed
FRONT DERAILLEUR	Shimano GRX FD-RX400
REAR DERAILLEUR	Shimano GRX RD-RX400
CRANKSET	Shimano GRX FC-RX600 46/30T
FRONT BRAKE	Shimano GRX BR-RX400 Flat Mount hydraulic
REAR BRAKE	Shimano GRX BR-RX400 Flat Mount hydraulic
FRONT BRAKE DISC	Shimano SM-RT10 centerlock 160 mm
REAR BRAKE DISC	Shimano SM-RT10 centerlock 160 mm
TYRES	Schwalbe G-ONE 700x38C
RIMS	Ryde DP19
FRONT HUB	Shimano HB-RS470 12 mm / 100 mm
REAR HUB	Shimano FH-RS470 12 mm / 142 mm
CASSETTE	Shimano CS-HG500 11-34T 10 speed
HANDLEBAR	aluminium 420 mm
STEM	aluminium 90 mm
SEAT POST	aluminium 27,2 mm 350 mm
SADDLE	Fizik Taiga
PEDALS	FP-971 aluminium
FRONT LAMP	—
REAR LAMP	—
WEIGHT	10,6 kg
COLOURS	black-red, black-gold

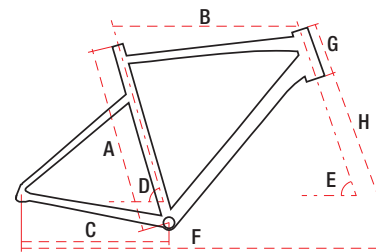

GEOMETRY

	S	M	L	XL
A – frame size	520 mm	540 mm	560 mm	580 mm
B – top tube length	540 mm	550 mm	570 mm	590 mm
C – chainstay length	440 mm	440 mm	440 mm	440 mm
D – seat tube angle	73°	73°	73°	73°
E – head tube angle	71,1°	71,1°	71,1°	71,1°
F – wheel base	1018 mm	1029 mm	1049 mm	1070 mm
G – head tube length	130 mm	150 mm	170 mm	190 mm
H – fork length	392 mm	392 mm	392 mm	392 mm
Stack	547 mm	566 mm	585 mm	604 mm
Reach	373 mm	378 mm	391 mm	405 mm