




# ASPRE 1



700C    alu 6061 X-lite    52 / 54 / 56 / 58 cm    16 speed    11,2 kg

## TECHNICAL DATA

WHEEL SIZE / FRAME	700C / alu 6061 X-lite
SIZE	52 cm / 54 cm / 56 cm / 58 cm
FORK	Carbon tapered
DAMPER	—
DRIVETRAIN	16 speed
FRONT SHIFTERS	Shimano Claris ST-R2000 2 speed
REAR SHIFTERS	Shimano Claris ST-R2000 8 speed
FRONT DERAILLEUR	Shimano Claris FD-R2000
REAR DERAILLEUR	Shimano Claris RD-R2000
CRANKSET	Shimano Claris FC-RS200 46/34T 170/175 mm
FRONT BRAKE	Shimano BR-RS305 Flat Mount
REAR BRAKE	Shimano BR-RS305 Flat Mount
FRONT BRAKE DISC	Shimano SM-RT10 centerlock 160 mm
REAR BRAKE DISC	Shimano SM-RT10 centerlock 160 mm
TYRES	Schwalbe G-ONE 700x38C
RIMS	Ryde DP19
FRONT HUB	Shimano HB-TX505
REAR HUB	Shimano FH-TX505
CASSETTE	Shimano HG200-8 12-32T 8 speed
HANDLEBAR	Romet Gravel aluminium 420 mm FLARE
STEM	Romet aluminium 90/100/110 mm
SEAT POST	Romet aluminium 27,2 mm 300/350/400 mm
SADDLE	Romet Gravel
PEDALS	FP-971 aluminium
FRONT LAMP	—
REAR LAMP	—
WEIGHT	11,2 kg
COLOURS	champagne-black, black-gold

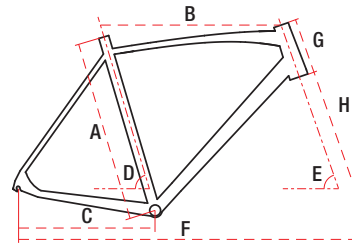

## GEOMETRY

	S	M	L	XL
A – frame size	520 mm	540 mm	560 mm	580 mm
B – top tube length	538 mm	550 mm	560 mm	580 mm
C – chainstay length	430 mm	430 mm	430 mm	430 mm
D – seat tube angle	74,5°	73,5°	73,5°	73°
E – head tube angle	70,5°	70,5°	71°	71°
F – wheel base	1026 mm	1029 mm	1035 mm	1050 mm
G – head tube length	130 mm	150 mm	170 mm	190 mm
H – fork length	378 mm	378 mm	378 mm	378 mm
Stack	534 mm	553 mm	574 mm	593 mm
Reach	390 mm	386 mm	390 mm	398 mm