



# GRAVEL ASPREE 2.1



# ASPRE 2.1

MTB

ROAD

GRAVEL

CROSS

TREKKING

JUNIOR / KIDS


TECHNICAL  
DATA



700C alu 6061 X-lite 52 / 54 / 56 / 58 cm 11 speed 10,4 kg

## TECHNICAL DATA

WHEEL SIZE / FRAME	700C / alu 6061 X-lite
SIZE	52 cm / 54 cm / 56 cm / 58 cm
FORK	Carbon tapered
DAMPER	—
DRIVETRAIN	11 speed
FRONT SHIFTERS	Sram Apex HRD flat mount
REAR SHIFTERS	Sram Apex HRD flat mount 11 speed
FRONT DERAILLEUR	—
REAR DERAILLEUR	Sram Apex
CRANKSET	Sram FC S350-1 40T
FRONT BRAKE	Sram Apex Flat Mount hydraulic
REAR BRAKE	Sram Apex Flat Mount hydraulic
FRONT BRAKE DISC	Sram Centerline 140 mm
REAR BRAKE DISC	Sram Centerline 140 mm
TYRES	Schwalbe G-One Bite Evo Super Ground 45-622
RIMS	Ursus Orion Disc
FRONT HUB	Ursus Orion Disc 12 mm / 100 mm
REAR HUB	Ursus Orion Disc 12 mm / 142 mm
CASSETTE	Sram CS PG 1130 11-42T 11 speed
HANDLEBAR	aluminium 312BT FOV 420 mm
STEM	aluminium 90 mm
SEAT POST	aluminium 27,2 mm 350 mm
SADDLE	Fizik Taiga
PEDALS	FP-971 aluminium
FRONT LAMP	—
REAR LAMP	—
WEIGHT	10,4 kg
COLOURS	blue-gray, silver-red

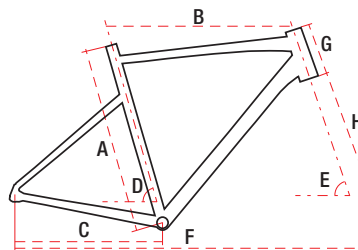

## GEOMETRY

	S	M	L	XL
A – frame size	520 mm	540 mm	560 mm	580 mm
B – top tube length	540 mm	550 mm	570 mm	590 mm
C – chainstay length	440 mm	440 mm	440 mm	440 mm
D – seat tube angle	73°	73°	73°	73°
E – head tube angle	71,1°	71,1°	71,1°	71,1°
F – wheel base	1018 mm	1029 mm	1049 mm	1070 mm
G – head tube length	130 mm	150 mm	170 mm	190 mm
H – fork length	392 mm	392 mm	392 mm	392 mm
Stack	547 mm	566 mm	585 mm	604 mm
Reach	373 mm	378 mm	391 mm	405 mm