




BOREAS 2 Lite



700C alu 6061 X-lite 52 / 54 / 56 / 58 cm 11 speed 10,4 kg

TECHNICAL DATA

WHEEL SIZE / FRAME	700C / alu 6061 X-lite
SIZE	52 cm / 54 cm / 56 cm / 58 cm
FORK	Carbon tapered
DAMPER	—
DRIVETRAIN	11 speed
FRONT SHIFTERS	brake lever Sram Apex
REAR SHIFTERS	Sram Apex 11 speed
FRONT DERAILLEUR	—
REAR DERAILLEUR	Sram Apex
CRANKSET	Sram FC-S350 40T 175mm
FRONT BRAKE	Sram Apex hydraulic
REAR BRAKE	Sram Apex hydraulic
FRONT BRAKE DISC	Shimano SM-RT10 centerlock 160 mm
REAR BRAKE DISC	Shimano SM-RT10 centerlock 160 mm
TYRES	Schwalbe G-One 700x38C
RIMS	Ryde DP19
FRONT HUB	Shimano HB-RS470 12 mm / 100 mm
REAR HUB	Shimano HB-RS470 12 mm / 142 mm
CASSETTE	Sram CS PG1130 11-42T 11 speed
HANDLEBAR	Romet Gravel aluminium 420 mm FLARE
STEM	Romet aluminium 90/100/110 mm
SEAT POST	Romet aluminium 27,2 mm 300/350/400 mm
SADDLE	Fizik Taiga
PEDALS	FP-971 aluminium
FRONT LAMP	—
REAR LAMP	—
WEIGHT	10,4 kg
COLOURS	black-beige

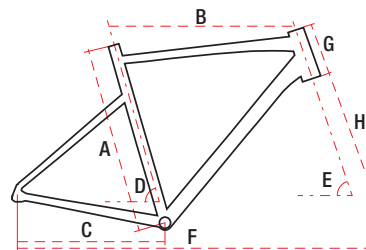

GEOMETRY

	S	M	L	XL
A – frame size	520 mm	540 mm	560 mm	580 mm
B – top tube length	540 mm	550 mm	570 mm	590 mm
C – chainstay length	440 mm	440 mm	440 mm	440 mm
D – seat tube angle	73°	73°	73°	73°
E – head tube angle	71,1°	71,1°	71,1°	71,1°
F – wheel base	1018 mm	1029 mm	1049 mm	1070 mm
G – head tube length	130 mm	150 mm	170 mm	190 mm
H – fork length	392 mm	392 mm	392 mm	392 mm
Stack	547 mm	566 mm	585 mm	604 mm
Reach	373 mm	378 mm	391 mm	405 mm